


output capacity 100V	500 W
output capacity RMS 8Ω	500 W
frequency range	50 Hz - 16 kHz
zones	6
direct output	4-16 Ω / 70V / 100V
tone control	yes (per input)
built-in music source	USB/SD - FM tuner - Bluetooth
line out	yes
MIC input	4 (combo XLR/Jack) + 2 (selective paging RJ45)
AUX input	2 (RCA)
chime function	yes
priority levels	5
	EMC input (externally injected signal)
	ALARM trigger (built-in)
	TEL input / REMOTE MIC (MIC-216)
	CHIME
	MIC1 (prior to MIC2-4/LINE1-2)
power supply	240V AC / 24V DC
power consumption	360W
dimensions (h x w x d)	88 x 484 x 353mm - 2RS
weight	7,2kg
accessories	MIC216 / MIC511C / MIC-621A

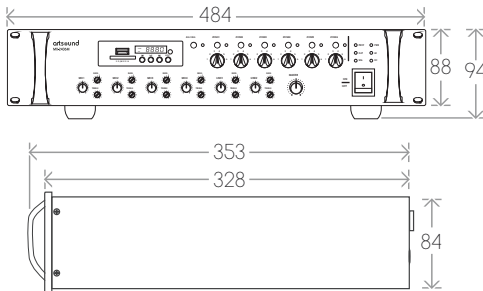

# MX-5006M

## 6-ZONE 19" SELECTIVE MIXING AMPLIFIER

This versatile mixing amplifier with integrated music source offers 500W output power. You can instantly create six zones operating independently (a single source simultaneously). They each have their own volume level and selective PA option.



The music in the refrigeration aisles is louder than in the checkout area of this supermarket. What's more, you can put out calls for staff per zone.